

MI33PRA/MI33PST

TECHNICAL DATA

Passive Instrument Cables




MI33PRA



MI33PST

- For use with all TA5 wired transmitters, including SM Series, DBu, LMb, LT, and DBSM/DBSMD models
- For use with passive pickups into “instrument” input on LT and DBSM/DBSMD transmitters, or with very high output instrument pickups such as electric bass guitars with 18 volt systems, using any TA5-wired transmitter.
- Designed for musicians who demand rugged, high-quality equipment and the best sound quality available
- 30-inch overall length

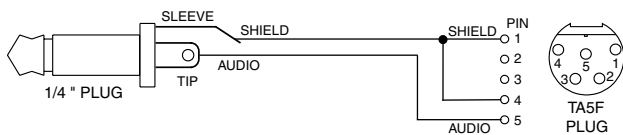

Wiring

Other cables available:

MI39ARA and MI39AST

Active cables for use with passive pickups or low-output instruments only, with IM, LM, LMa, UM400, UM400a, SM Series, and LMb transmitters.

Transmitter Setup Instructions

Play at the same level expected during the performance and adjust the input gain until the -20 LED flickers red (indicating +0 dB) during the loudest passages.

