


Digital Audio Adapter Cable



PIN CONNECTIONS

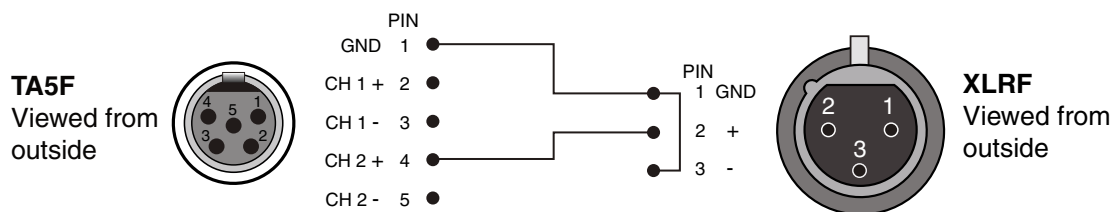

This cable is used to connect the AES output of a digital mixer or recorder to the AES input of the Lectrosonics SPDR portable recorder. It is constructed with a TA5F jack, rugged coaxial cable and a 3-pin female XLR connector. The connectors have soldered connections to the cable, allowing them to be serviced or replaced if the need arises.

Connectors: • 5-pin TA5F female
• XLR-3 female

Cable: RG-174U coaxial

Length: 18 inches

