


M150 Electret Microphone

The M150 is a high performance microphone with heavily suppressed mechanical noise for critical applications. A wide, flat frequency response is augmented by a 2 or 3 dB bump in the upper octaves to add a crisper sound. The mic capsule should be positioned in the center of the talker's chest, not to either side, as high up as is practical. In windy conditions, it can be placed underneath a collar or thin clothing to reduce wind noise, although this will dull the sound somewhat.

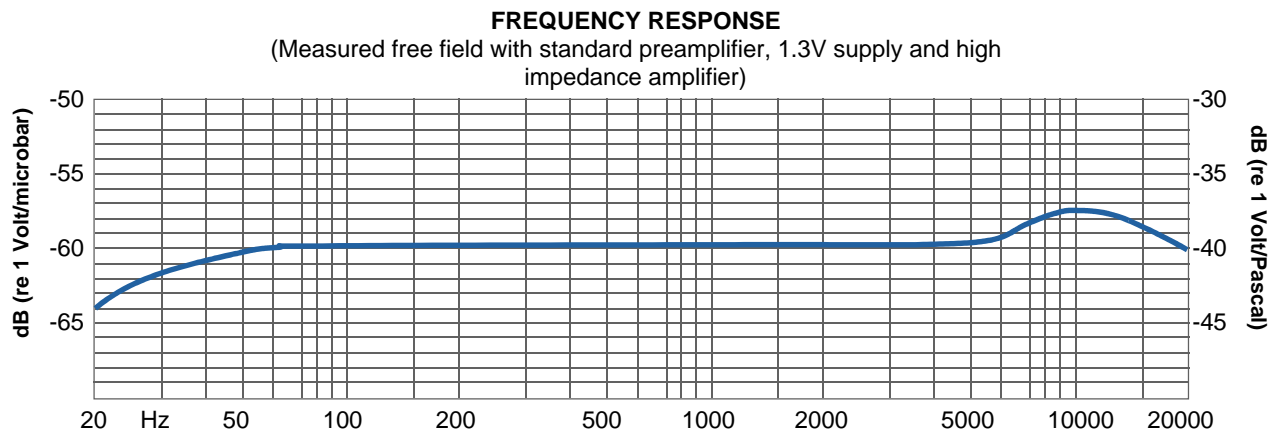

Sensitivity: 10mV per Pascal / 100mV @ 114 dB SPL

Impedance: 3 k (2-6 k)

Polar Pattern: Omnidirectional

Freq Range: 20 - 20,000 Hz

Max Operating Voltage: 10V

Standard Operating Voltage: 2V

Current Consumption: 30uA @ 1.3V

Signal/Noise Ratio: More than 38dB



LECTROSONICS

581 Laser Road, Rio Rancho, NM 87124 USA

phone (800) 821-1121 or (505) 892-4501

fax (505) 892-6343

e-mail: sales@lectrosonics.com