


Right Angle Whip Antenna

24 August 2012

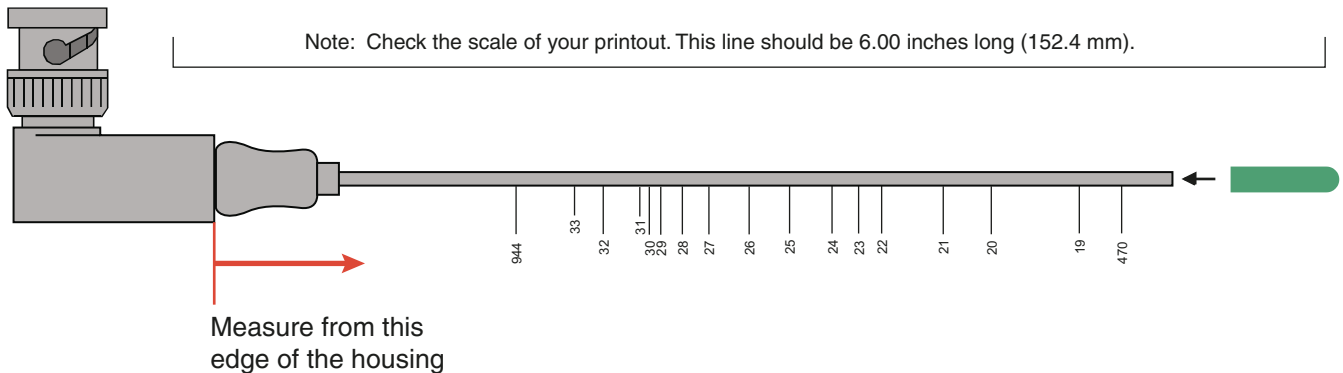

A500RA antennas are shipped from the factory pre-cut and fully assembled. The full size template above can be used to identify an unknown antenna. Place the unknown antenna over the drawing to see which block it was cut for.

BLOCK	FREQUENCY RANGE	CAP COLOR	ANTENNA WHIP LENGTH	
470	470.100 - 495.600	Black w/ Label	4.73"	120.1 mm
19	486.400 - 511.900	Black w/ Label	4.51"	114.6 mm
20	512.000 - 537.500	Black w/ Label	4.05"	102.9 mm
21	537.600 - 563.100	Brown	3.80"	96.5 mm
22	563.200 - 588.700	Red	3.48"	88.4 mm
23	588.800 - 614.300	Orange	3.36"	85.3 mm
24	614.400 - 639.900	Yellow	3.22"	81.8 mm
25	640.000 - 665.500	Green	3.00"	76.2 mm
26	665.600 - 691.100	Blue	2.79"	70.9 mm
27	691.200 - 716.700	Violet (Pink)	2.58"	65.5 mm
28	716.800 - 742.300	Grey	2.44"	62.0 mm
29	742.400 - 767.900	White	2.33"	59.2 mm
30	768.000 - 793.500	Black w/ Label	2.27"	57.5 mm
31	793.600 - 819.100	Black w/ Label	2.22"	56.4 mm
32	819.200 - 844.700	Black w/ Label	1.93"	49.0 mm
33	844.800 - 861.900	Black w/ Label	1.88"	47.8 mm
944	944.100 - 951.900	Black w/ Label	1.57"	39.9 mm